

HELIAX® Fiber Drop Cable Installation for HHC series assemblies


Bulletin 7822473 Revision H Page 1 of 2

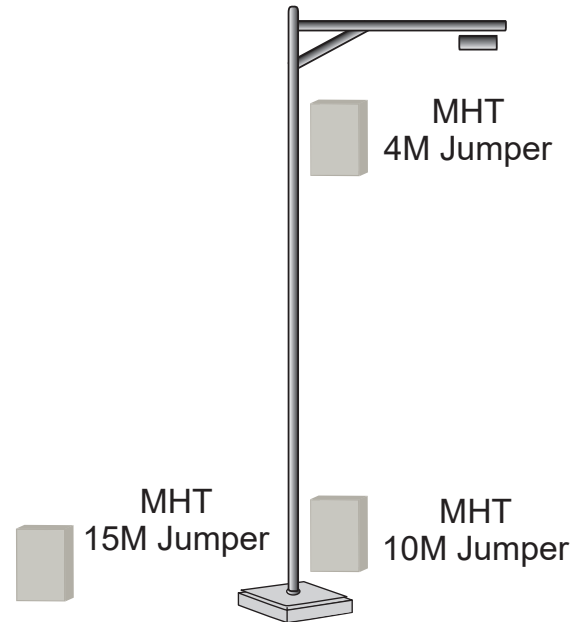
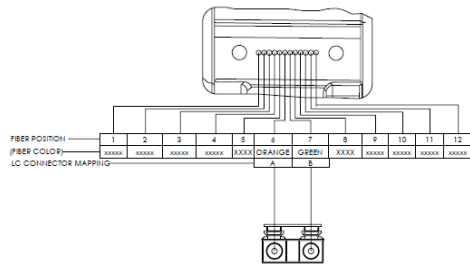
Pulling in Conduit Recommendation

Ensure the conduit is the proper size for the diameter (D) of the cable to be pulled. Use of a cable lubricant can reduce the tension when pulling through conduit.

USE – Water* and Silicone-based products designed for cable pulling

DON'T USE – Detergent and Petroleum based products can eat away at cable jacket materials

$$\text{Fill Ratio} = D_{\text{cable}}^2 / D_{\text{conduit}}^2$$




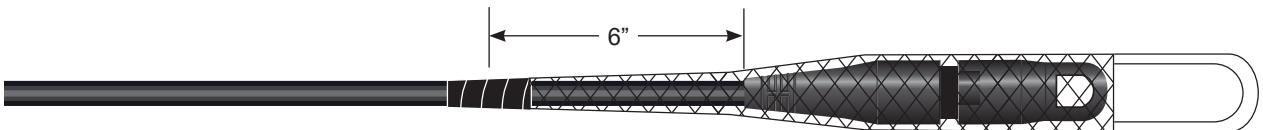
- 1 Fiber jumper installation requires the use of a pulling grip. Pulling from the LC end is recommended. **DO NOT** anchor or connect the jumper before routing. Start by protecting the LC connectors with bubble wrap or equivalent.



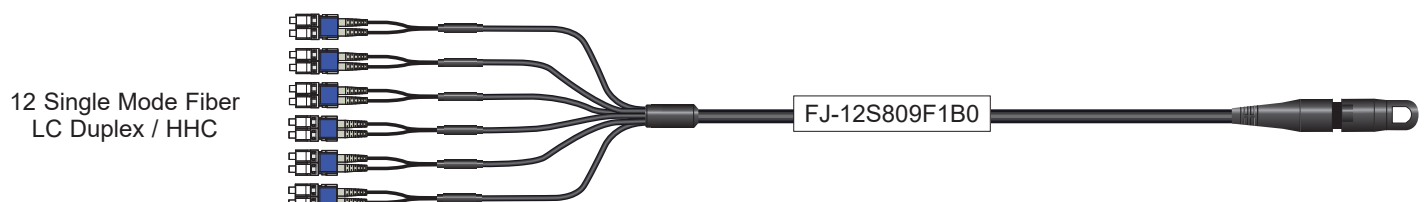
- 2 Install a pulling grip over the protected LC connectors. The end of the grip **MUST** go past the transition sleeve by a minimum of 6 inches. **DO NOT** exceed 20 lbs of pulling force.



- 3 If pulling from the HHC end is required the end of the pulling grip **MUST** go past the back of the connector by a minimum of 6 inches. **DO NOT** exceed 20 lbs of pulling force. **DO NOT** anchor or connect the jumper before routing.

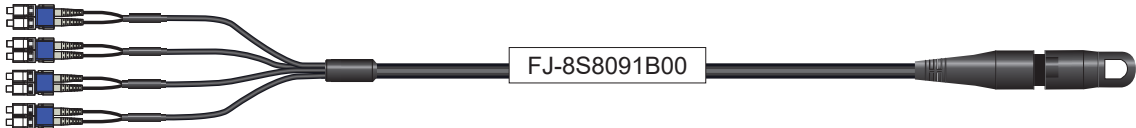










Breakout Variations (continued on page 2)



HELIAX® Fiber Drop Cable Installation for HHC series assemblies

Bulletin 7822473 Revision H Page 2 of 2

8 Single Mode Fiber LC Duplex / HHC	
6 Single Mode Fiber LC Duplex / HHC	
4 Single Mode Fiber LC Duplex / HHC	
2 Single Mode Fiber LC Duplex / HHC	
2 Single Mode Fiber Bidi / HHC	
2 Single Mode Fiber Bidi / HHC	
2 Single Mode Fiber Bidi / HHC	
2 Single Mode Fiber LC Duplex / HHC	
1 Single Mode Fiber BiDi / HHC	
2 Single Mode Fiber BiDi / HHC	
2 Single Mode Fiber BiDi staggered / HHC	
3 Single Mode Fiber BiDi / HHC	
3 Single Mode Fiber BiDi staggered / HHC	

ANDREW an Amphenol company

2601 Telecom Parkway, Richardson, Texas, 75082, USA
www.andrew.com

Notice: ANDREW disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.
Aviso: ANDREW no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.
Avis: ANDREW décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.
Hinweis: ANDREW lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.
Atenção: A ANDREW abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.
Avvertenza: ANDREW declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.
注意: ANDREW 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負責任。何義務和責任。

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.

Technical Support

+1 888 297 6433, Option 3 (Toll Free US and Canada)
awpnarsupport@andrew.com