
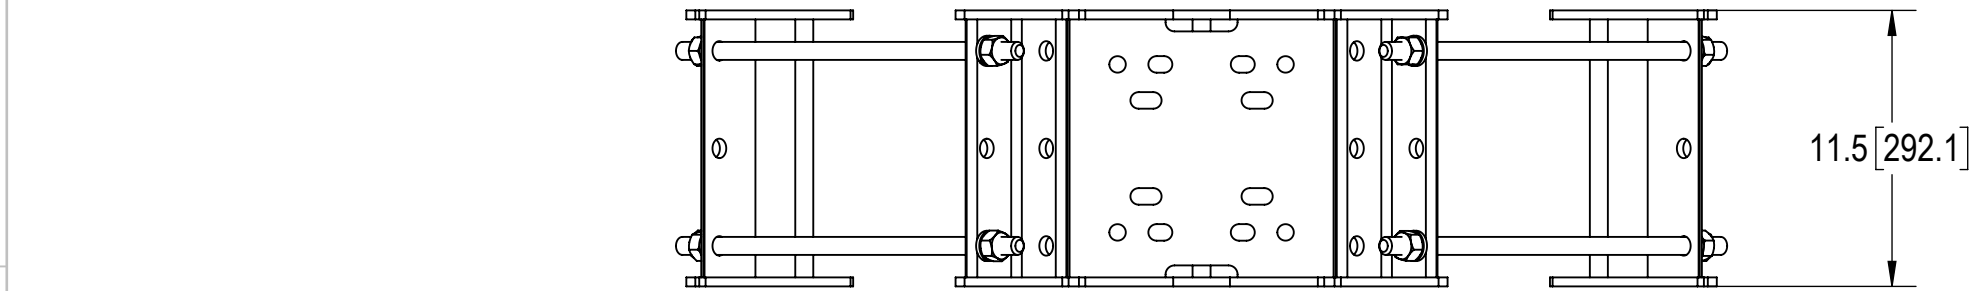
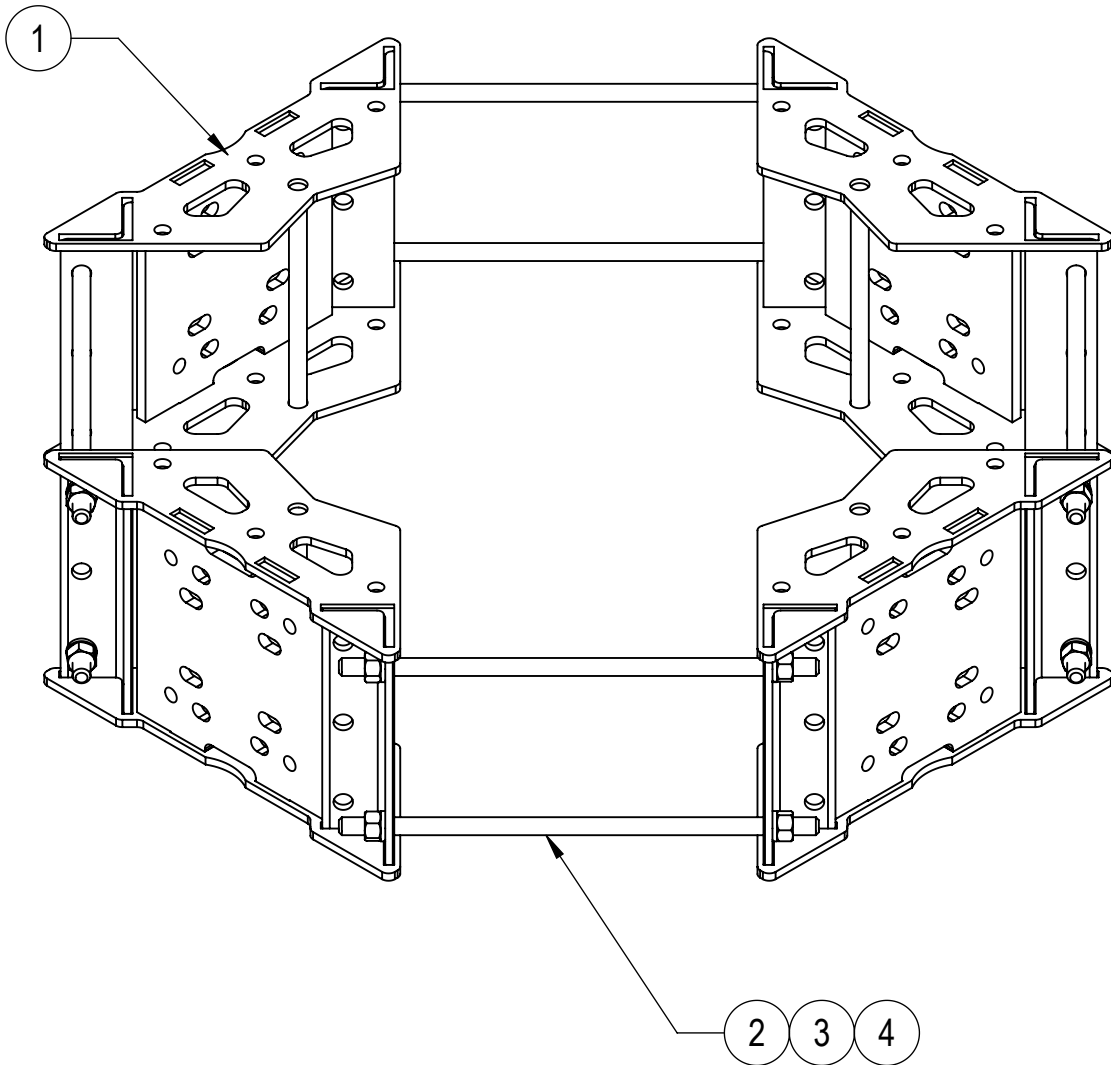


- 4
- 3
- 2
- 1
- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	REDESIGN	AW 05NOV04	
G	REDESIGN WELDMENT	MSM 16NOV11	
H	NEW DESIGN WELDMENT	MSM 12JUL16	TP 8000015106
J	DESIGN UPDATED	YX1027 27AUG24	AG1119 40201197CMO

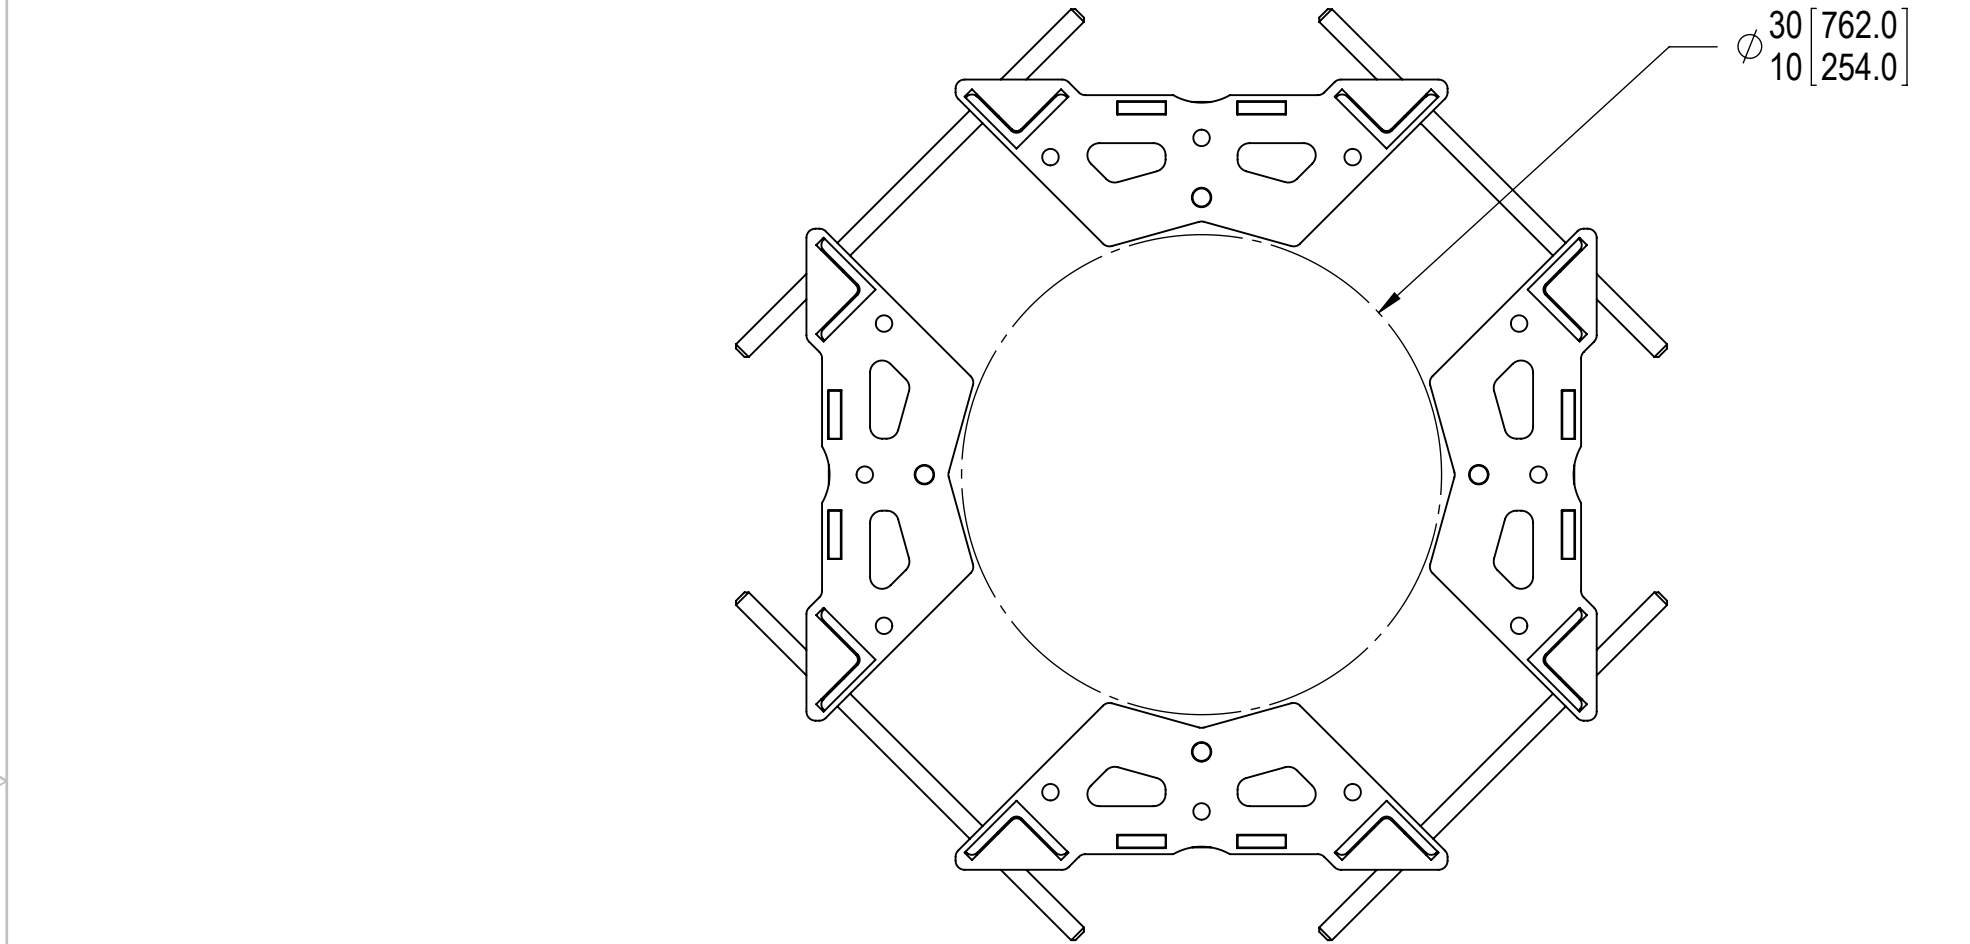

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	RM1030405	10-30 4 SECTOR RM KIT	4	45.20 LBS	
2	MT-384-20	3/4" X 20" GALV THREADED ROD	8	2.48 LBS	
3	GWL-06	3/4" GALV LOCK WASHER	16	0.04 LBS	
4	GN-06	3/4" GALV HEX NUT	16	0.15 LBS	

DENSITY	MASS	203.64	lbs/in³
	VOLUME	1180.13	in³
	SURFACE AREA	6135.39	in²
	HEIGHT	11.5"	
	LENGTH	39.0"	
	WIDTH	39.0"	

**ANDREW**® an Amphenol company

TOLERANCES		SAP MATERIAL MASTER						
1 PLACE .X[X] ± 0.12[3.0]	3 PLACE .XXX[X] ± 0.03[0.8]	MC-RM1030-4						
2 PLACE .XX[X] ± 0.06[1.5]	ANGLES ± 2°							
FINISH		MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	TITLE FOUR SECTOR RING MOUNT, 10-30 OD				
		CE AW	05NOV04					
		RW LL1090	07/15/2025					
		AD YMENG	07/15/2025					
		RE YMENG	07/15/2025					
ECN 40201197CMO		SCALE 1:10		DOCUMENT NO. MC-RM1030-4				
SIZE	Auth Group	INSL	MODEL		DRAWING		SHEET 1 OF 1	
C			VERSION	STATUS	REVISION	VERSION		STATUS
			01	RE	J	01	RE	J

Confidential